

# KAIA

## EON

'A line with system'

Designed by Peter Straka  
Vienna 2005-07


On its own, EON is clean and linear. Attach one, or more – create endless combinations. EON is a lighting system which allows multiple shapes and angles – squares, rectangles, zig-zags.



Process: All components of the EON lighting system are solid brass. The brass is polished and then nickel plated. Lastly the components are assembled to a system whatever required.

## EON

Suspension  
50 set



Type	Suspension light
Material	Brass
Environment	Indoors
Cable Length	2000 mm - 78 <sup>3/4</sup> "
Dimensions	600 x 100 mm - 23 <sup>2/3</sup> x 3 <sup>15/16</sup> "
Weight	1 kg - 2.2 lbs
Certification	IP20 CE; ETL US/CSA Canada
EU/UK - US	230 V - 110 V
Ceiling Rose	square 70 x 70 x 25 mm - flat Ø4.33 x 0.19"
Lamps	max 60 W, S14s, our suggestion: 1x Linear opal LED, 2700 K, Mains ( Phase) dimmable, EPREL-ID: 566200
Lamps US	Linear opal LED S14s*, 7W, 2700K, 610 lm, Mains dimmable (leading edge)
Standard finishes:	
070 02 101 11	polished nickel
070 02 209 12	black matte


\* Other finishes on request, please inquire to [sales@kaiaeditions.com](mailto:sales@kaiaeditions.com).

\*\* On very rare occasions, these lamps may appear to have a slight buzzing or flickering. As is the case with all retro LED lamps, this is likely caused by a number of outside influences such as incorrect installation, wiring, dimming or transformers and in some instances low electrical resistance.

\*\*\* Please contact [sales@kaiaeditions.com](mailto:sales@kaiaeditions.com) for further information on dimmers etc. Please note KAIA Ltd cannot take any responsibility for the connection with your dimming or central control system. It is the customer's responsibility to ensure the compatibility with their systems.

### EON

Suspension  
100 set




Type	Suspension light
Material	Brass
Environment	Indoors
Cable Length	2000 mm - 78 <sup>3</sup> / <sub>4</sub> "
Dimensions	1100 x 100 mm - 43 <sup>1</sup> / <sub>2</sub> x 3 <sup>15</sup> / <sub>16</sub> "
Weight	1.4 kg - 3.09 lbs
Certification	IP20 CE; ETL US/CSA Canada
EU/UK - US	230 V - 110 V
Ceiling Rose	square 70 x 70 x 25 mm - flat Ø4.33 x 0.19"
Lamps	max 120 W, S14s, our suggestion: 1x Linear opal LED, 2700 K, Mains ( Phase) dimmable, EPREL-ID: 566195
Lamps US	Linear opal LED S14s*, 13 W, 2700 K, Mains dimmable (leading edge), 1150 lm

#### Standard finishes:

070 01 101 11	polished nickel
070 01 209 12	black matte

### EON

Suspension  
100 set 2

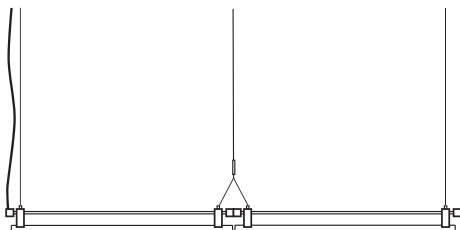


Type	Suspension light
Material	Brass
Environment	Indoors
Cable Length	2000 mm - 78 <sup>3</sup> / <sub>4</sub> "
Dimensions	2110 x 100 mm - 83 <sup>5</sup> / <sub>16</sub> x 3 <sup>15</sup> / <sub>16</sub> "
Weight	2.4 kg - 5.29 lbs
Certification	IP20 CE; ETL US/CSA Canada
EU/UK - US	230 V - 110 V
Ceiling Rose	square 70 x 70 x 25 mm - flat Ø4.33 x 0.19"
Lamps	max 120 W, S14s, our suggestion: 2x Linear opal LED, 2700 K, Mains ( Phase) dimmable, EPREL-ID: 566195
Lamps US	2x Linear opal LED S14s*, 13 W, 2700 K, Mains dimmable (leading edge), 1150 lm

#### Standard finishes:

070 03 101 11	polished nickel
070 03 209 12	black matte

### EON

Suspension  
100 set 3

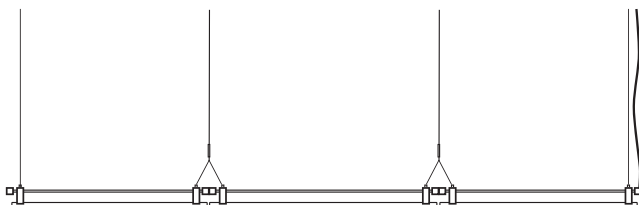

Type	Suspension light
Material	Brass
Environment	Indoors
Cable Length	2000 mm - 78 <sup>3</sup> / <sub>4</sub> "
Dimensions	3120 x 100 mm - 122 <sup>7</sup> / <sub>8</sub> x 3 <sup>15</sup> / <sub>16</sub> "
Weight	3.3 kg - 7.28 lb
Certification	IP20 CE; ETL US/CSA Canada
EU/UK - US	230 V - 110 V
Ceiling Rose	square 70 x 70 x 25 mm - flat Ø4.33 x 0.19"
Lamps	max 120 W, S14s, our suggestion: 3x Linear opal LED, 2700 K, Mains ( Phase) dimmable, EPREL-ID: 566195
Lamps US	3x Linear opal LED S14s*, 13 W, 2700 K, Mains dimmable (leading edge), 1150 lm


#### Standard finishes:

070 04 101 11	polished nickel
070 04 209 12	black matte



### EON

Suspension  
100 set 2  
centre cable

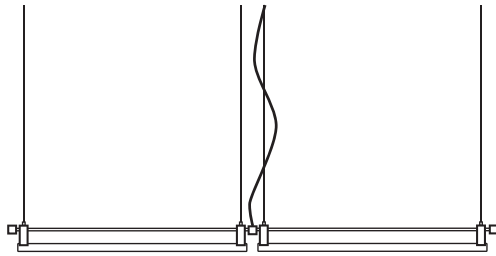


Type	Suspension light
Material	Brass
Environment	Indoors
Cable Length	2000 mm - 78 <sup>3/4</sup> "
Dimensions	2160 x 100 mm - 85 x 3 <sup>15/16</sup> "
Weight	2.4 kg - 5.29 lbs
Certification	IP20 CE; ETL US/CSA Canada
EU/UK - US	230 V - 110 V
Ceiling Rose	square 70 x 70 x 25 mm - flat Ø4.33 x 0.19"
Lamps	max 120 W, S14s, our suggestion: 2x Linear opal LED, 2700 K, Mains (Phase) dimmable, EPREL-ID: 566195
Lamps US	2x Linear opal LED S14s*, 13 W, 2700 K, Mains dimmable (leading edge), 1150 lm

#### Standard finishes:

070 05 101 11	polished nickel
070 05 209 12	black matte

### EON

Suspension  
100 square




Type	Suspension light
Material	Brass
Environment	Indoors
Cable Length	2000 mm - 78 <sup>3/4</sup> "
Dimensions	1100 x 1100 x 100 mm - 43 <sup>1/3</sup> x 43 <sup>1/3</sup> x 31 <sup>15/16</sup> "
Weight	5 kg - 11.02 lbs
Certification	IP20 CE; ETL US/CSA Canada
EU/UK - US	230 V - 110 V
Ceiling Rose	square 70 x 70 x 25 mm - flat Ø4.33 x 0.19"
Lamps	max 120W, S14s, our suggestion: 4x Linear opal LED, 2700 K, Mains (Phase) dimmable, EPREL-ID: 566195
Lamps US	4x Linear opal LED S14s*, 13 W, 2700 K, Mains dimmable (leading edge), 1150 lm

#### Standard finishes:

070 06 101 11	polished nickel
070 06 209 12	black matte

### EON

Suspension  
50 square



Type	Suspension light
Material	Brass
Environment	Indoors
Cable Length	2000 mm - 78 <sup>3/4</sup> "
Dimensions	600 x 600 x 100 mm - 23 <sup>2/3</sup> x 23 <sup>2/3</sup> x 31 <sup>5/16</sup> "
Weight	4 kg - 8.82 lbs
Certification	IP20 CE; ETL US/CSA Canada
EU/UK - US	230 V - 110 V
Ceiling Rose	square 70 x 70 x 25 mm - flat Ø4.33 x 0.19"
Lamps	max 60W, S14s, our suggestion: 4x Linear opal LED, 2700 K, Mains (Phase) dimmable, EPREL- ID: 566200
Lamps US	4x Linear opal LED S14s*, 7W, 2700K, 610 lm, Mains dimmable (leading edge)

#### Standard finishes:

070 07 101 11	polished nickel
070 07 209 12	black matte

