




## w201 Extra small pendant s1 traffic white

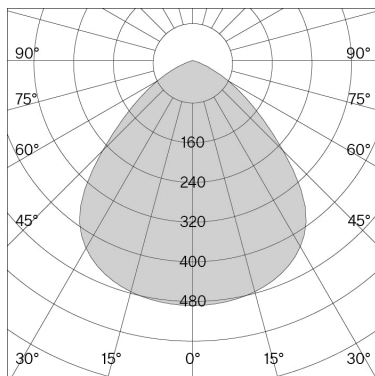

## w201 Extra small pendant s2 traffic white

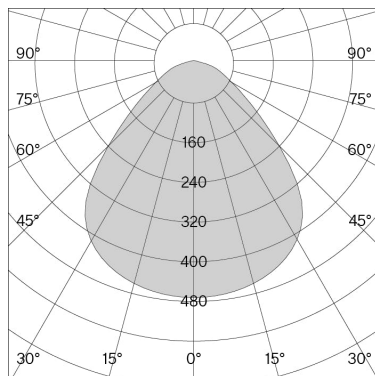

## w201 Extra small pendant s1



## Technical information

### Physical

<b>Material</b>	Shade: solid aluminium Canopy: polycarbonate
-----------------	--

<b>Optics</b>	Reflector & diffuser prism: polycarbonate
---------------	---

<b>IP rating</b>	20
------------------	----

<b>Protection class</b>	II
-------------------------	----

### LED

<b>Light source</b>	COB LED (included)
---------------------	--------------------

<b>Life time expectancy</b>	L80 / 50,000 h
-----------------------------	----------------

<b>CRI Colour Rendering Index</b>	97
-----------------------------------	----

<b>Standard deviation of colour matching</b>	3-step MacAdam
--	----------------

### Replaceable by a professional

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.

## Article-specific information

### Version

### Mounting

### LED Colour temperature (CCT) / Luminous flux

### Voltage / System power

### Efficacy

### Light control

### Net weight

### Packaging dimensions

### Gross weight

### Phase-cut dim

### Traffic white (RAL 9016)

### Jet black (RAL 9005)

### Raw

### DALI dim-Push dim

### Traffic white (RAL 9016)

### Jet black (RAL 9005)

### Raw

### s1

### Ceiling suspended

### 2700 K / 424 lm

### 220–240 V / 7.8 W

### 54 lm / W

### Phase-cut dim / DALI dim-Push dim

### 0.4 kg

### L16 × W14 × H15 cm (0.003 m<sup>3</sup>)

### 0.6 kg

### Art. No. / EAN code

**201S129016** / 7330492008608

**201S129005** / 7330492008615

**201S120002** / 7330492001180


### Art. No. / EAN code

**201S1290162** / 7330492000152


**201S1290052** / 7330492000169

**201S1200022** / 7330492001197

## w201 Extra small pendant s2



## w201 Extra small pendant s3



## Article-specific information

Version	s2	s3
Mounting	Ceiling suspended	Ceiling suspended
LED Colour temperature (CCT) / Luminous flux	2700 K / 446 lm	2700 K / 446 lm
Voltage / System power	220–240 V / 7.8 W	220–240 V / 7.8 W
Efficacy	57 lm / W	57 lm / W
Light control	Phase-cut dim / DALI dim-Push dim	Phase-cut dim / DALI dim-Push dim
Net weight	0.6 kg	0.8 kg
Packaging dimensions	L14 × W14 × H17 cm (0.003 m <sup>3</sup> )	L20 × W20 × H13 cm (0.005 m <sup>3</sup> )
Gross weight	1.0 kg	1.2 kg
Phase-cut dim	Art. No. / EAN code	Art. No. / EAN code
Traffic white (RAL 9016)	201S229016 / 7330492008608	201S329016 / 7330492008660
Jet black (RAL 9005)	201S229005 / 7330492008615	201S329005 / 7330492008677
Raw	201S220002 / 7330492001203	201S320002 / 7330492001227
DALI dim-Push dim	Art. No. / EAN code	Art. No. / EAN code
Traffic white (RAL 9016)	201S2290162 / 7330492000176	201S3290162 / 7330492000190
Jet black (RAL 9005)	201S2290052 / 7330492000183	201S3290052 / 7330492000206
Raw	201S2200022 / 7330492001210	201S3200022 / 7330492001234