




## w202 Halo s2

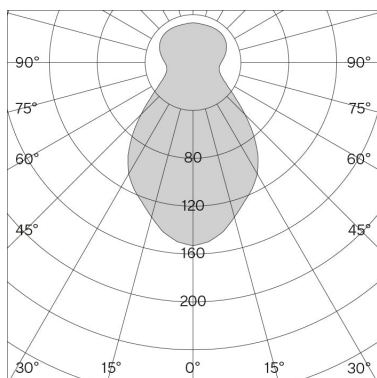

## w202 Halo s3

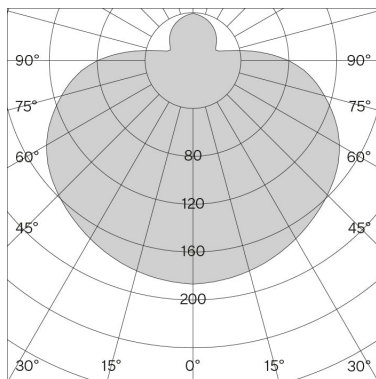

## w202 Halo s2

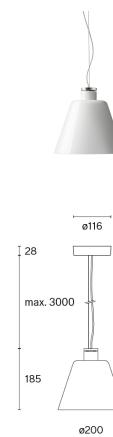

## Technical information


<b>Physical</b>	
<b>Material</b>	Shade & bulb: mouth-blown opal glass Heat sink & top plate: aluminium Canopy: polycarbonate
<b>IP rating</b>	20
<b>Protection class</b>	II
<b>LED</b>	
<b>Light source</b>	COB LED (included)
<b>Life time expectancy</b>	L80 / 50,000 h
<b>CRI Colour rendering index</b>	≥ 95
<b>Standard deviation of colour matching</b>	3-step MacAdam
<b>Replaceable by a professional</b>	

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.


## Article-specific information

<b>Version</b>	s2
<b>Mounting</b>	Ceiling suspended
<b>LED Colour temperature (CCT) / Luminous flux</b>	2700 K / 449 lm
<b>Voltage / System power</b>	220-240 V / 7.8 W
<b>Efficacy</b>	58 lm / W
<b>Light control</b>	Phase-cut dim / DALI dim-Push dim
<b>Net weight</b>	1.2 kg
<b>Packaging dimensions</b>	L31.4 × W29 × H39.1 cm (0.04 m <sup>3</sup> )
<b>Gross weight</b>	2.4 kg
<b>Phase-cut dim</b>	
<b>White</b>	<input checked="" type="radio"/> <b>202S200</b> / 7330492008691
<b>DALI dim-Push dim</b>	
<b>White</b>	<input checked="" type="radio"/> <b>202S2002</b> / 7330492000213

## w202 Halo s3

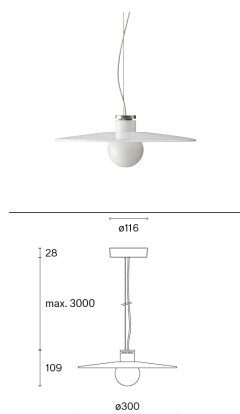

## w202 Halo s4

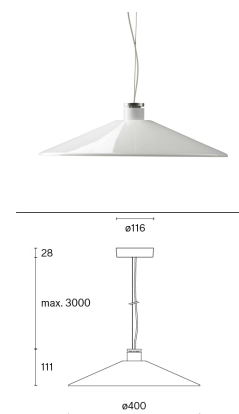

## Article-specific information

<b>Version</b>	s3	s4
<b>Mounting</b>	Ceiling suspended	Ceiling suspended
<b>LED Colour temperature (CCT) / Luminous flux</b>	2700 K / 475 lm	2700 K / 478 lm
<b>Voltage / System power</b>	220-240 V / 7.8 W	220-240 V / 7.8 W
<b>Efficacy</b>	61 lm / W	61 lm / W
<b>Light control</b>	Phase-cut dim / DALI dim-Push dim	Phase-cut dim / DALI dim-Push dim
<b>Net weight</b>	1.2 kg	2.4 kg
<b>Packaging dimensions</b>	L41.4 × W40 × H26.5 cm (0.04 m <sup>3</sup> )	L51.1 × W49.3 × H32.5 cm (0.08 m <sup>3</sup> )
<b>Gross weight</b>	2.3 kg	3.9 kg
<b>Phase-cut dim</b>	<b>Art. No. / EAN code</b>	<b>Art. No. / EAN code</b>
White ●	202S300 / 7330492008707	202S400 / 7330492008714
<b>DALI dim-Push dim</b>	<b>Art. No. / EAN code</b>	<b>Art. No. / EAN code</b>
White ●	202S3002 / 7330492000220	202S4002 / 7330492000237