



w227 Winkel alu

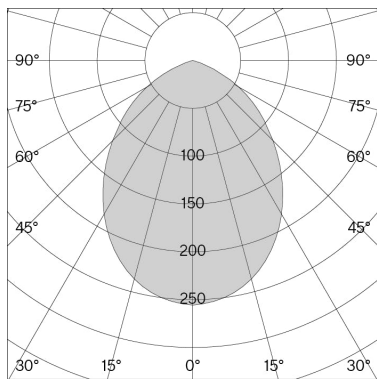

w227 Winkel alu

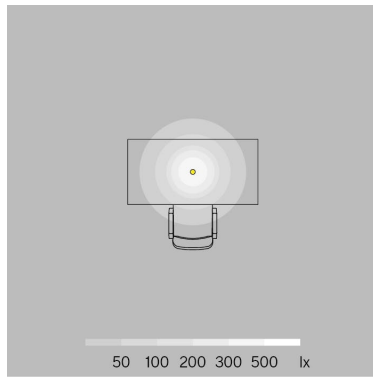

w227 Winkel alu b



Technical information

Physical

| | |
|-----------------|--|
| Material | Lamp body: aluminium Base & pin: steel |
|-----------------|--|

| | |
|---------------|--|
| Optics | Diffuser: acrylic Reflector & glare shade: polyamide |
|---------------|--|

| | |
|------------------|----|
| IP rating | 20 |
|------------------|----|

| | |
|-------------------------|-----|
| Protection class | III |
|-------------------------|-----|

LED

| | |
|---------------------|--------------------|
| Light source | COB LED (included) |
|---------------------|--------------------|

| | |
|----------------------------|----------------|
| Lifetime expectancy | L80 / 50.000 h |
|----------------------------|----------------|

| | |
|-----------------------------------|----|
| CRI Colour rendering index | 97 |
|-----------------------------------|----|

| | |
|--|----------------|
| Standard deviation of colour matching | 3-step MacAdam |
|--|----------------|

Replaceable by a professional

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.

Article-specific information

Version

Mounting

LED Colour temperature (CCT) / Luminous flux

Voltage / System power

Efficacy

Light control

Net weight

Packaging dimensions

Gross weight

Colour / Finish

Traffic white (RAL 9016)

Jet black (RAL 9005)

Raw tumbled

Accessories

Adapter suitable for USM Haller Table

Adapter suitable for USM Haller Shelf

Adapter suitable for Vitra Joyn 2

Adapter suitable for Vitra Tyde 2

b

Base

3000 K / 497 lm

100–240 V / 8.2 W

60 lm / W

Integrated dimmer switch (timer 8h)

3.33 kg

L53 × W36.5 × H14.3 cm

5.13 kg

Art. No. / EAN code


227B20230 / 7330492000701

227B20530 / 7330492000718

227B22030 / 7330492001692




Art. No. / EAN code

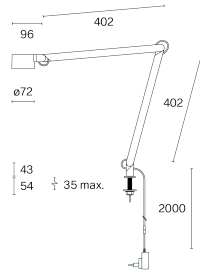w227 Winkel alu p



Article-specific information

| | |
|--|---|
| Version | p |
| Mounting | Pin - integrated (hole \varnothing 14 mm) |
| LED Colour temperature (CCT) / Luminous flux | 3000 K / 497 lm |
| Voltage / System power | 100–240 V / 8.2 W |
| Efficacy | 60 lm / W |
| Light control | Integrated dimmer switch (timer 8h) |
| Net weight | 0.6 kg |
| Packaging dimensions | L53 × W36.5 × H14.3 cm |
| Gross weight | 2.4 kg |

| | |
|--|---------------------------|
| Colour / Finish | Art. No. / EAN code |
| Traffic white (RAL 9016)  | 227P20230 / 7330492000725 |
| Jet black (RAL 9005)  | 227P20530 / 7330492000732 |
| Raw tumbled  | 227P22030 / 7330492001708 |

| | |
|---------------------------------------|---------------------------|
| Accessories | Art. No. / EAN code |
| Adapter suitable for USM Haller Table | 227ACC001 / 7330492002040 |
| Adapter suitable for USM Haller Shelf | 227ACC006 / 7330492002057 |
| Adapter suitable for Vitra Joyn 2 | 227ACC002 / 7330492002064 |
| Adapter suitable for Vitra Tyde 2 | 227ACC003 / 7330492002071 |